



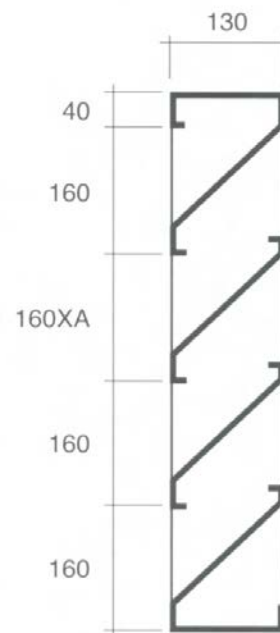

FIXET SLAT WINDOWS

Model F-130

Slat windows are made indispensable by combining them with a ventilation of the static or dynamic type. For a good functioning of the static ventilation, it is necessary to install air inlets by means of slat windows located at the lower level of the building. The air inlet surface must be 1.5 times larger than the static fan outlet surface.

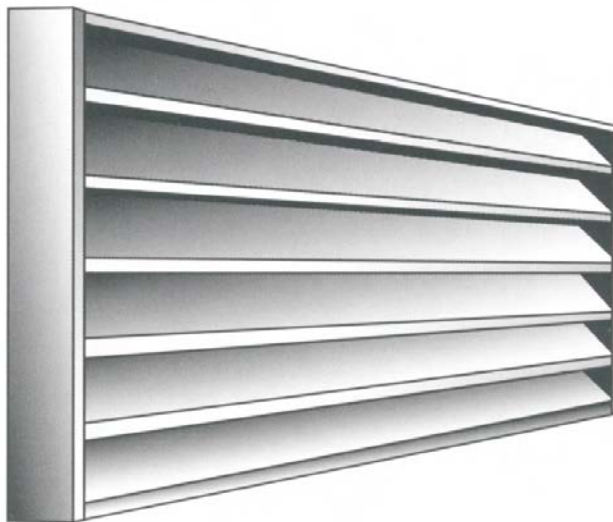

Windows are made **TO ORDER**.

Optionally ALL GRILLS can be added an anti-bird mesh

Standard dimension: 2000 X 1000 mm

Materials:

- Z-275 galvanized sheet, thickness 0.80 mm (UNE 36130, EN 10142)
- 25 micron pre-painted polyester sheet (UNE 36130, EN 10169), thickness 0.80 mm, white color similar to RAL 9003
- Other thicknesses and / or finishes, please consult.